



## **91 Series “Snap-Tite” Tear Strip Lid**

491 series

Mold Number(s): R91C


An industrial lid suitable for solid and powdered products in light duty applications where ease of removal is desired. For use with any of our “Beam” or “Open Head” Style Pails. The top of the lid is recessed to aid in stacking and stability during transport.

### **PERFORMANCE SPECIFICATIONS**

- No objection status for food contact applications from the Health Protection Branch in Canada and compliance for use in food contact applications by the Food and Drug Administration in the United States. Black lids excluded.
- For tamper-evident applications Reliance recommends using our 27 series lid.

### **DIMENSIONS**

	<b>Weight</b> 165.0g ± 5.0g	
<b>Dimensions (approximate)</b>	<b>Outer Diameter</b> 12.2”	<b>Thickness</b> 0.9”

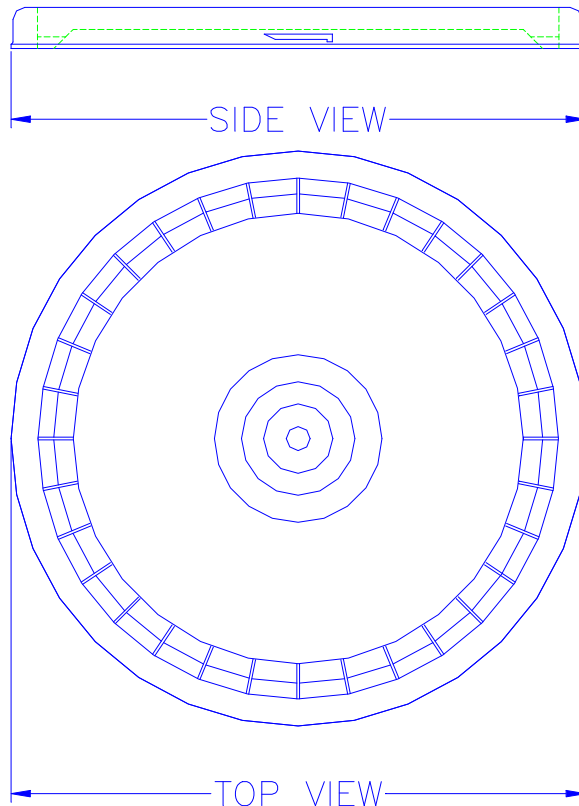

## SPECIAL FEATURES

Tear Strip	A tear strip is provided on this lid to improve ease of removal.
Resealing	Once the tear-strip has been removed, the lid is easily replaced and secured onto the pail.

## FILLING AND STACKING RECOMMENDATIONS

- Total weight on the lid of the bottom pail not to exceed 50kg. Adjust stack height to accommodate.
- Lids should not be applied to pails while in the “stacked” position as this puts excessive impact stress on the lids beneath. Lids should be applied before stacking pails.
- Compatibility of the container with the fill product is the responsibility of the filler.
- Contents should not exceed 70°C (158°F) at time of fill.
- Filled packages should not be stacked and stored above 50°C (122°F).
- Any fill product should be wiped clean from the bead of the pail before affixing the lid.
- The centre of the lid should be depressed when affixing the lid to the pail, forcing out excess air.
- The use of double-faced pallets is recommended. The packages should be evenly spaced on the pallet so that they do not exceed the edges of the pallet.

## PACKAGING AND SHIPPING DATA

	<u>Cartons</u>	<u>Bulk</u>
<b>Quantity Per Carton</b>	96 pieces	840 pieces
<b>Cartons Per Pallet</b>	8	N/A
<b>Packaged Carton Weight</b>	39.3 lbs.	329.4 lbs.
<b>Carton Dimensions (L x W x H)</b>	37.8” x 12.9” x 25.4”	48.5” x 37.2” x 50.0”
<b>Carton Volume (Cubic Feet)</b>	7.2	52.3

## WARRANTY

Reliance Products L.P. warrants product to meet the above specifications and to be free from defect in workmanship and materials at time of shipment. *Liability is limited to the replacement cost of the containers purchased. Reliance Products LP does not test specific product packaging requirements and as such, customers are required to assure packaging meets the legal, environmental and containment needs of the product being packaged.*

## PRODUCT RANGE

Reliance Products L.P. has many decades of experience manufacturing a wide range of both injection and blow moulded plastic shipping containers, including:

Bottles	1L to 23L	Tighthead Containers	10L to 23L
Pails	4L to 23L	Collapsible Containers	10L to 25L

[Call us for all of your related packaging needs](#)